




3000k
4000k
5700k

IP
65



PROTEK CITY OPTICAL

4183 58 18 85	18 w	2975 lm.
4183 58 25 85	25 w	4315 lm.
4183 58 35 85	35 w	5950 lm.

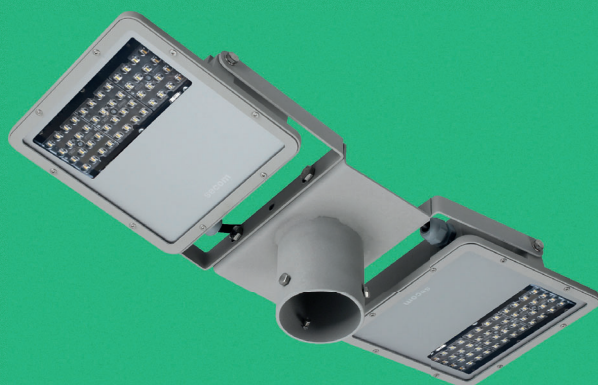

PROTEK CITY OPTICAL DUO

4184 58 18 85	2x18 w	5950 lm.
4184 58 25 85	2x25 w	8630 lm.
4184 58 35 85	2x35 w	11900 lm.

PROTEK CITY OPTICAL TRIO

4185 58 18 85	3x18 w	8925 lm.
4185 58 25 85	3x25 w	12945 lm.
4185 58 35 85	3x35 w	17850 lm.



OPCIONES / 18 w / 25 w / 35 w

AMB	LED Ámbar / Amber LED
3401	Simétrica intensiva 30°
3402	Simétrica media 67°
3403	Simétrica extensiva 91°
3405	Asimétrica extensiva
3406	Simétrica extensiva 160°
3407	Asimétrica longitudinal

DR	Driver regulable 1-10
DRD	Driver regulable Dali
DRF	Driver regulable corte de fase (18w)
DN	Regulación doble nivel
DRPR	Driver programable
4160	Driver para funcion. a 12Vdc.

*Promoción válida hasta el 31 de diciembre de 2020

